


# Operation Guide for DRC12



Thanks for purchasing AEE DRC12 watch remote control. Designed for AEE cameras with Wi-Fi, this product can help you control the camera to perform such functions as video recording, photo shooting and parameter setting remotely.

This Guide will specify how to install and use DRC12 and provide such information as instructions for use and operation, installation precautions and technical specifications. Please read this Guide carefully before using DRC12 and keep it for future reference.

## Components

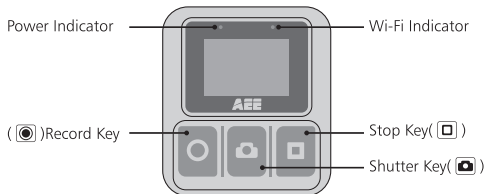


## Charging

When the battery power becomes low, the battery icon will be displayed as "🔋". To charge the battery, install DRC12 onto the charging cradle and use the USB cable to connect it to the power adapter (Output: DC 5V 1000mA).

## Power On

Long press "⏻" for 3s to turn on DRC12. The power indicator comes on, and the battery icon "🔋" and product version information will appear on the screen. Long press "⏻" for 3s again to turn off DRC12.




## Connection to Camera

1. Turn on the camera, enable its Wi-Fi function and enter [Settings] to select "STA" as the Wi-Fi mode.
2. Long press "⏻" for 3s to turn on DRC12.
3. DRC12 will auto search for Wi-Fi signals. When "1" appears on the screen, one Wi-Fi signal source has been found.




4. When "CONNECTED" appears on the screen, the connection is successful.



5. DRC12 will ask whether to connect more cameras. Press "⏻" to select "No" and press "📷" to confirm. The information displayed by the camera and DRC12 will be synchronized and DRC12 will enter the one-to-one standby state for video recording.


















If you select "Yes", DRC12 will auto search for and connect other cameras. When the connections are successful, DRC12 will enter the one-to-many standby state for video recording.










## Basic Operations

Basic operations for one-to-one connection:

	Operation
Video recording	Press “  ” to start video recording. Press “  ” to stop video recording.
Photo shooting	Press “  ” to switch to the photo shooting mode and press it again to take a photo. Press “  ” to return to the video recording mode.
Mode switching	Long press “  ” for 2s to enter the full screen mode, press “  ” or “  ” to select the required mode and press “  ” to confirm.
Parameter Setting	Long press “  ” for 2s to enter the full screen mode, press “  ” or “  ” to select “ <b>M</b> ” and press “  ” to enter. Press “  ” to select the required parameter and press “  ” to confirm. Finally press “  ” to exit.

Basic operations for one-to-many connection:

	Operation
Video recording	Press “  ” to start video recording. Press “  ” to stop video recording.
Photo shooting	Press “  ” to take a photo.
Mode switching	Long press “  ” to enter the full screen mode, press “  ” or “  ” to select the required mode and press “  ” to confirm.
Parameter Setting	Not available.

## Specifications

Item	Specifications
Charging time	About 2h
Battery life	About 4h
Battery capacity	330mAh
Waterproof rating	IP67
Remote control range	One-to-one: about 197 feet One-to-many: about 66 feet
Dimension	1.77" x 1.57" x 0.55"
Weight	0.06 lbs
Working temperature	-10 ~50 degrees F
Storage temperature	-20 ~60 degrees F

## Precautions

1. As a sophisticated product, DRC12 should be protected against fall and physical impact.
2. Please keep DRC12 away from magnet, motor, antenna and other objects with strong magnetic fields or strong radio waves, which may cause fault to the product.
3. Do not expose DRC12 to high temperature or direct sunlight.
4. Keep DRC12 in a cool, dry and dust-free place.
5. To keep DRC12 idle for long, please power it off since it does not provide the auto standby function.
6. If DRC12 is disconnected unexpectedly, just restart it.
7. To avoid faults, please do not perform any operation when charging DRC12.